


# SUPER MAXI



*Startwell*  
[www.startwell.com](http://www.startwell.com)

Applications include:

Caterpillar  
Cummins  
Detroit  
Man  
Perkins  
Scania  
Volvo

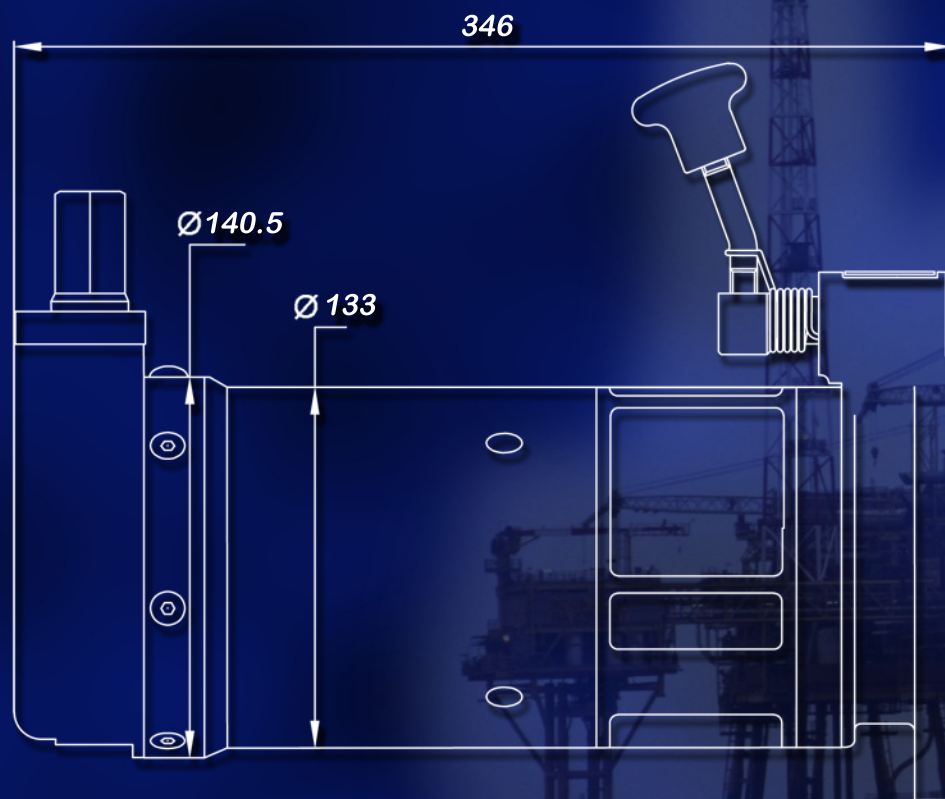

## Startwell Engineering (UK) Ltd.



5 The Crystal Centre,  
Crystal Way  
Elmgrove Road,  
Harrow,  
HA1 2HP, UK

tel +44 (0) 20 8863 4450  
fax +44 (0) 20 8863 4410

For further information see our web site:

[www.startwell.com](http://www.startwell.com)

### Maxi Specification

Rotation:	Model SXC Clockwise Model SXA Anti-clockwise
Mounting:	Flange mounted SAE 1; SAE 2; SAE 3
Engine capacity:	2 litre/cyl, six cylinders maximum 1.5 litre/cyl, eight cylinders maximum
Pinion Type:	11 to 13 teeth 10/12 F/stub 11 to 13 teeth 6/8 F/stub 11 to 12 teeth 6/8 F/stub 11 to 13 teeth Mod 3
Pinion to flange face:	47mm (Nominal)
Maximum torque at pinion:	140Nm (104 Ft.lb)
Maximum winding handle torque:	95 Nm (70Ft.lb)
Winding handle position:	Variable in 8.5° increments
No. of turns to fully wind:	Two turns to engage, further 15.5 turns to fully charge
Weight:	28Kg
Cold Start:	Starting aid below 5°
Finish:	Marine finish as standard. Zinc plated body and housing. Powder coated paint all over to withstand marine environment. Electroless nickel plated shaft and pinion.

